

Public Address (PA) System Mixer Amplifier with Timer FA-460T/FA-4120T/FA-4280T/FA-4380T/FA-4480T



Description:

The 4 Zone Mixer Amplifier with MP3&Timer, with rated power output from 60W, 120W,280W, 380W to 480W, it is ideal for background music system.

It is all in one solution include pre amplifier and mixer power amplifier into one 19" 2U height unit, which is economy of high reliable performance.

Various inputs includes phone jack front panel) and Mic/Line input 2-3 (6.3mm phone jack rear panel), two aux inputs (RCA rear panel).

Mic1 override other sources input and with mute level control amplifier is design with complete protection of overload, short circuit and high temp to avoid any damage.


Suitable for applications in bank, mosque, school theme centers and shopping center

Features:

- Public address (PA) mixer amplifier.
- 4 zone mixer power amplifier.
- 19" rack mount amplifier of 2U height.
- Built-in MP3 player by USB & timer
- Amplifier power timing open and close control function,
- Rated outputs of 60W, 120W, 280W, 380W to 480W
- 4 zone speaker outputs of 100V/70V/4-16ohms.
- Four zone speaker outputs with on/off button and zone status
- Three microphone inputs, two aux inputs and one line output.
- Mic1(6.3mm phone jack front panel) and Mic/Line input 2-3(6.3mm phone jack rear panel).
- Aux 1-2 inputs on rear panel by RCA.
- Mic1 mute with highest priority
- input and with mute level control
- Volume control for Mic1-3, Aux
- AC power and output level meters.
- Overload, short circuit and high temp protection
- AC 230V operation system and AC115

Public Address (PA) System Mixer Amplifier with Timer FA-460T/FA-4120T/FA-4280T/FA-4380T/FA-4480T

Rear Panel:

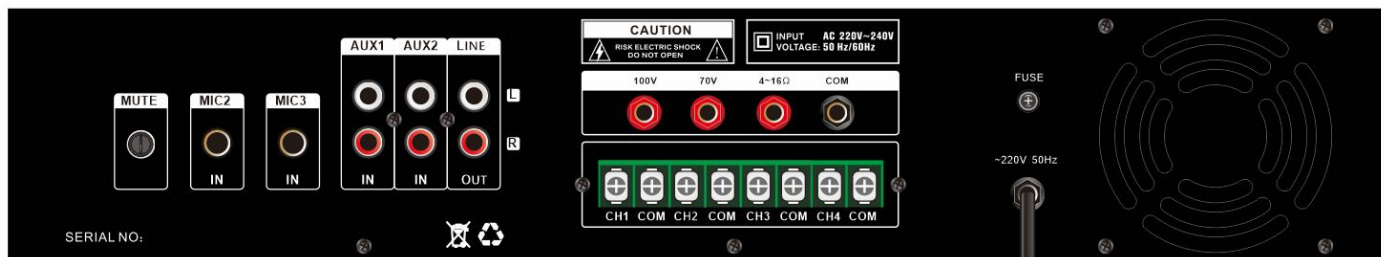

Specification:

Model	FA-460T	FA-4120T	FA-4280T	FA-4380T	FA-4480T
Description	Public Address System Mixer Amplifier				
Rated Power Output	60W	120w	280w	380w	480
Speaker Output	70V, 100V and 4-16Ω, 4 zone speaker out 100V				
Input	Mic1-3: 600 ohms(Ω) 5-8 mV, unbalanced, Line1-2: 10k ohms(Ω) 150-470 mV, unbalanced				
Frequency Response	60-15KHz				
THD	<0.5% at 1kHz, 1/3 rated power				
S/N Ratio	Line: 85 dB , MIC: >72 dB				
Protection	High temp, short circuit, overload protection				
Power Supply	AC230V or AC110V, 50-60Hz				
Power Consumption	100W	200W	400W	500W	600W
Dimension	484(W)×360(D)×90(H)mm				
Gross Weight	7.5kg	9.5kg	12kg	12.8kg	15.8kg
Warranty	3 years				