


PA Amplifier with ECHO/USB/SD & FM & Blue Tooth, DC12V FA-30MD/FA-60MD

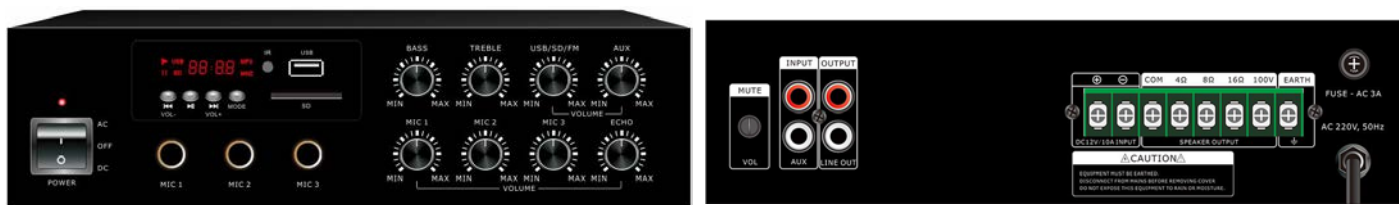

Features:

- Compact mini size public address amplifier
- Ideal for classroom sound system use
- Built-in 100V/70V transformer technology
- Tabletop amplifier with Mp3 player, FM radio & blue tooth
- Rate power output at 30W to 60W . Speaker output of 100V or 70V & 4Ohms-8 Ohms-16 Ohms
- Mp3 player with USB/SD input on front panel, IR remote control for Mp3 player, FM radio and blue tooth
- LED indicators for power, clip, protect and signal
- Mic1-3 and one line. Mic1 of highest priority and one RCA line input and one RCA line output
- Volume control for Mic1-3, line1 and ECHO, Mp3/FM, bass/treble and master
- With short-circuit, clip, overload and high temp protection
- AC220V or 115V & 12V DC both operation system

Specification:

Model	FA-30MD	FA-60MD
Description	Public Address System 30W Mixer Amplifier	
Rated Power Output	30W	60w
Speaker Output	70V, 100V and 4-16Ω	
Input	Mic1-3: 600 ohms(Ω) 5-8 mV, unbalanced, Line1: 10k ohms(Ω) 150-470 mV, unbalanced	
Frequency Response	60-15KHz	
THD	<0.5% at 1kHz, 1/3 rated power	
S/N Ratio	Line: 85 dB , MIC: >72 dB	
Protection	High temp, short circuit, overload protection	
Power Supply	AC230V or DC12V, 50-60Hz	
Power Consumption	50W	80W
Dimension	253(W)×220(D)×68(H)mm	
Gross Weight	4.2kg	5.3kg
Warranty	3 years	