

Public Address (PA) System 60W Mixer Amplifier FA-120



Description:

The Public Address (PA) 120 Watts Mixer Amplifier is suitable for school, super market, bank, hotel BGM and speech use.

It integrates pre amplifier and mixer power amplifier into one 19" 2U height unit of tabletop design, which is economy but of high reliable performance.

The tabletop mixer amplifier rated power out at 120W. Its speaker outputs with 100V, 70V and 4 - 16ohms for versatile connections.

It integrates three microphone and two line inputs. Mic1 VOX with priority. Microphone1 on front panel by phone jack, microphone2 - 3 on rear panel by phone jack, line 1 - 2 on rear panel by RCA inputs. Microphone1 - 3 & Line1 - 2 inputs volume control on front panel with bass and treble tone control.


The amplifier is design with complete protection of overload, short circuit and high temp to avoid any damage.

Features:

- Public address (PA) tabletop mixer power amplifier.
- Commercial & industrial range BGM & paging amplifier.
- Rated outputs of 120W.
- 70V, 100V and low impedance 4-16 ohms speaker outputs.
- 3 microphone inputs and 2 line inputs.
- Mic1 on front panel by phone jack, mic2-3 on rear panel by phone jack.
- Line 1-2 inputs on rear panel by RCA.
- Microphone1 of VOX features of highest input priority.
- Microphone1-3 & Line1-2 inputs volume control on front panel with bass and treble tone control.
- Power and output level meters.
- Overload, short circuit and high temp protection.
- With natural cooling fan to control the internal temperature.
- Warranty of 5 years with CE certificate.

Public Address (PA) System 60W Mixer Amplifier FA-120

Rear Panel:

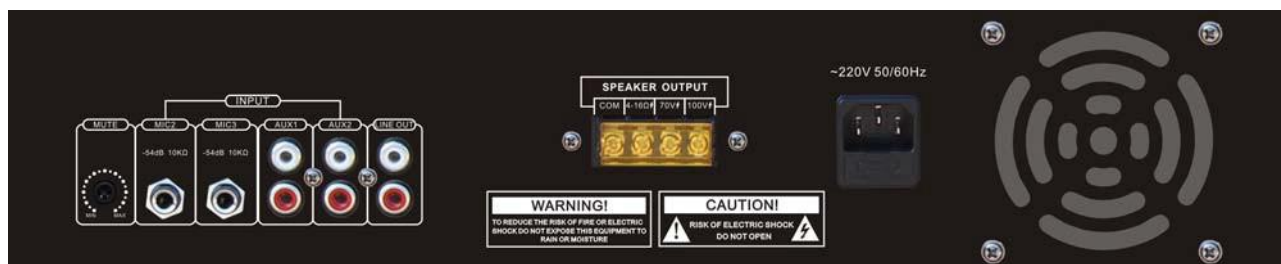

Specification:

Model	FA-120
Description	Public Address System 60W Mixer Amplifier
Rated Power Output	120W RMS
Speaker Output	70V, 100V and 4-16Ω
Input	Mic1-3: 600 ohms(Ω) 5-8 mV, unbalanced, Line1-2: 10k ohms(Ω) 150-470 mV, unbalanced
Frequency Response	60-15KHz
THD	<0.5% at 1kHz, 1/3 rated power
S/N Ratio	Line: 85 dB , MIC: >72 dB
Protection	High temp, short circuit, overload protection
Power Supply	AC230V or AC110V, 50-60Hz
Power Consumption	95W
Dimension	484(W)×366(D)×88(H)mm
Packaging:	520(W)×435(D)×185(H)mm
Net. Weight	11.4kg
Gross Weight	13.1kg
Warranty	5 years